

Rec'd PCT/PTO 02 SEP 2004

506,482

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
12 September 2003 (12.09.2003)

PCT

(10) International Publication Number
WO 03/075486 A1

(51) International Patent Classification⁷: **H04B 7/005**,
H04L 12/56, 29/06

(21) International Application Number: PCT/SE03/00383

(22) International Filing Date: 6 March 2003 (06.03.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0200696-3 6 March 2002 (06.03.2002) SE

(71) Applicant (for all designated States except US): **TELEFONAKTIEBOLAGET L M ERICSSON** [SE/SE];
S-126 25 Stockholm (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **SAGFORS, Mats**
[SE/FI]; Ravalsvägen 2E 16, FIN-02400 Kyrkslätt (FI).

(74) Agents: **MAGNUSSON, Monica** et al.; Ericsson Radio
Systems AB, Patent Unit Radio Access, S-164 80 Stock-
holm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,
VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD AND SYSTEM OF LOAD CONTROL

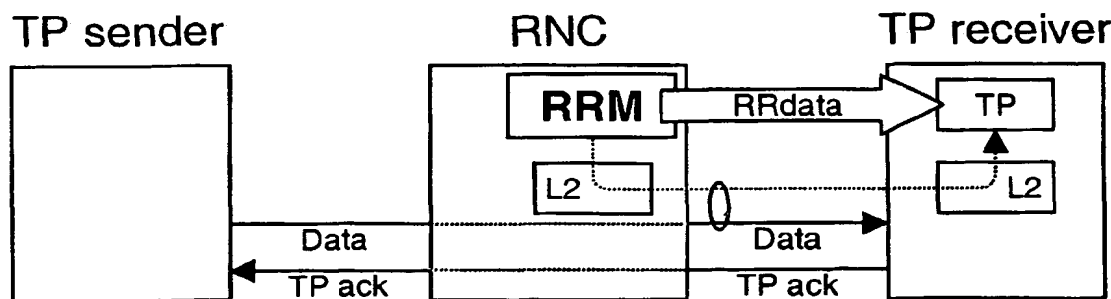

(57) Abstract: The present invention relates to transmission and retransmission of packet data in a communications system, where the communications system uses rate switching or channel switching. It provides an interface for information exchange between radio resource management and one or more transport protocol entities in a cellular mobile radio system, particularly a Universal Mobile Telecommunications System, UMTS, or WCDMA system.

WO 03/075486 A1

BEST AVAILABLE COPY

Method and system of load control

TECHNICAL FIELD OF THE INVENTION

The present invention relates to transmissions and retransmissions of packet data in a communications system, where
5 the communications system uses rate switching or channel switching. Especially, it relates to radio link load control in a cellular mobile radio system, particularly a Universal Mobile Telecommunications System, UMTS, or WCDMA system.

10 BACKGROUND AND DESCRIPTION OF RELATED ART

Radio resource management and admission control are fundamental features of a radio communications system sharing radio resources between users, user sessions and radio bearers.

15 In packet data communications, transport protocols, such as TCP, involving congestion control are widely used.

The Internet Society: Request for Comments (RFC) No. 793, Transmission Control Protocol, DARPA Internet Program Protocol Specification, September 1981 describes the functions
20 to be performed by the Transmission Control Protocol (TCP), the program that implements it, and its interface to programs or users that require its services.

The Internet program protocol specification discusses a receiver advertised window, *rwnd*, used e.g. in congestion
25 control and the impact of a shrinking *rwnd*. It also discusses how TCP should operate in relation to *rwnd*.

The Internet Society: Request for Comments (RFC) No. 2581, April 1999 specifies in detail TCP congestion control. One

of the control parameters is the congestion window, *cwnd*, another is the advertised receiver window, *rwnd*.

During Congestion Avoidance *cwnd* is increased in relation to round-trip time until a packet loss is detected, which
5 is interpreted as congestion. This is e.g. the case if a retransmission timer times out without a packet being acknowledged during the retransmission time of the packet.

At the beginning of a data transfer TCP probes the network for its conditions. For each (positively) acknowledged
10 data packet, the sender-side increases *cwnd* until it reaches a threshold *ssthresh*. During data transfer *cwnd* and *ssthresh* are adapted in relation to received acknowledgements.

The advertised receiver window, *rwnd*, is transmitted together with acknowledgments from TCP receiver to TCP
15 sender, acknowledging received TCP packets.

The RFC also defines the concepts segment, receiver maximum segment size, *RMSS*, and sender maximum segment size, *SMSS*. *cwnd* is an integer multiple of *SMSS*.

20 A segment is any TCP/IP data or acknowledgment packet (or both). The *RMSS* is the size of the largest segment the receiver is willing to accept. The *SMSS* is the size of the largest segment that the sender can transmit. *SMSS* can be set to the maximum transmission unit, *MTU*, of the network,
25 a path *MTU* (see below) or *RMSS*.

The Internet Society: Request for Comments (RFC) No. 1191, November 1990 describes a technique for dynamically discovering a maximum transmission unit, *MTU*, of an arbitrary Internet path. A path *MTU*, *PMTU*, is the minimum of the
30 *MTUs* of each hop of the path. Upon receipt of a "Datagram too big" message, the host reduces initially assumed *PMTU*

for the path. RFC1191 suggests that also *MTU* size is reported in association with the "Datagram too big" message. Normally, if the route changes and the new *PMTU* is lower, it will be discovered. For detection of increased *PMTU*,
5 the segment size can be increased periodically. The RFC discusses TCP actions and management interface.

The Internet Society: Request for Comments (RFC) No. 3150, July 2001 discusses interactions between TCP Congestion Control and TCP Buffer Auto-tuning. The RFC recommends
10 that if a host is connected over links of different speeds at different times, the host may use receive buffer auto-tuning to adjust the advertised window to an appropriate value.

R.W. Stevens: TCP/IP Illustrated, Volume 1, Addison-Wesley, Reading Mass., 1994, describes in section 1.2 layering of
15 networking protocols and the combination of different protocols into a protocol suite. Stevens describes a 4-layer system with layers

- link layer,
- 20 - network layer,
- transport layer, and
- application layer.

The link layer is also called data link layer, and could e.g. include a device driver in an operating system of a
25 computer. The network layer handles packet movements such as packet routing. Examples of the network layer include IP (Internet Protocol), ICMP (Internet Control Message Protocol), and IGMP (Internet Group Management Protocol). The transport layer concerns data flows between two hosts. Ex-
30 amples of transport layer protocols are TCP (Transport Control Protocol) and UDP (User Datagram Protocol). The ap-

plication layer handles application details. Well-known exemplary application layer protocols are FTP (File Transfer Protocol) and SMTP (Simple Mail Transfer Protocol).

5 *P. Kuhlberg: Effect of Delays and Packet Drops on TCP-based Wireless Data Communication, Master's Thesis, University of Helsinki, Dept. of Computer Science, December 2000, discusses in appendix D topics to be further investigated. Included is investigation of receiver window impact on TCP performance.*

10 *P. Sarolahti, A. Gurtov, P. Kuhlberg, M. Kojo, K. Raatikainen: Tuning TCP Advertised Window for Bottleneck Links with Variable Delays, to appear in ICC 2002, April 2002 suggests halving the advertised window for each connection when a new TCP connection starts using a bottleneck link in*
15 *parallel with an existing TCP connection and maintenance of a common window space for all connections to a mobile station based on link bandwidth-delay estimation at receiver. Each TCP connection gets to advertise its fair share of the shared window space.*

20 *3rd Generation Partnership Project (3GPP), Technical Specification Group Radio Access Network, Radio Resource Management Strategies, 3GPP TS 25.922 v3.6.0, France, September 2001, illustrates in section 6.3 some scenarios of Admission Control in relation to radio resource management, RRM.*
25 *Radio bearer control is described in section 7.*

Within this patent application, a radio network controller, RNC, is understood as a network element including an RRM (Radio Resource Management) entity. The RNC is connected to a fixed network. Node B is a logical node responsible
30 for radio transmission/reception in one or more cells to/from a User Equipment. A base station, BS, is a physical entity representing Node B. A server device provides

information accessible to other devices over a communications network such as, e.g., the Internet.

With reference to figure 1, base stations «BS 1» and «BS 2» are physical entities representing Nodes B «Node B 1» and «Node B 2» respectively. «Node B 1» and «Node B 2» terminate the air interface, called Uu interface within UMTS, between UE and respective Node B towards the radio network controller «RNC». «RNC» is connected to a fixed network «Network». The fixed network may comprise one or more Server Devices «Server Device».

In figure 1, the base stations are connected to the same radio network controller RNC. However, this specification also covers the exemplary situation where the base stations are connected to different RNCs. In UMTS, the RLC protocol is terminated in a serving RNC, SRNC, responsible for interconnecting the radio access network of UMTS to a core network.

3rd Generation Partnership Project (3GPP): *Technical Specification Group Radio Access Network, Radio Interface Protocol Architecture, 3GPP TS 25.301 v3.6.0, France, September 2000*, describes an overall protocol structure of a Universal Mobile Telecommunications System (UMTS). There are three protocol layers:

- physical layer, layer 1 or L1,
- data link layer, layer 2 or L2, and
- network layer, layer 3 or L3.

Layer 2, L2, and layer 3, L3 are divided into Control and User Planes. Layer 2 consists of two sub-layers, RLC and MAC, for the Control Plane and four sub-layers, BMC, PDCP, RLC and MAC, for the User Plane. The acronyms BMC, PDCP, RLC and MAC denote Broadcast/Multicast Control, Packet Data

Convergence Protocol, Radio Link Control and Medium Access Control respectively.

Figure 2 displays a simplified UMTS layers 1 and 2 protocol structure for a Uu Stratum, UuS, or Radio Stratum, between
5 a user equipment UE and a Universal Terrestrial Radio Access Network, UTRAN.

Radio Access Bearers, RABs, are associated with the application for transportation of services between core network, CN, and user equipment, UE, through a radio access network.
10 Each RAB is associated with quality attributes such as service class, guaranteed bit rate, transfer delay, residual BER, and traffic handling priority. An RAB may be assigned one or more Radio Bearers, RBs, being responsible for the transportation between UTRAN and UE. For each mobile station there may be one or several RBs representing a
15 radio link comprising one or more channels between UE and UTRAN. Data flows (in the form of segments) of the RBs are passed to respective Radio Link Control, RLC, entities which amongst other tasks buffer the received data segments. There is one RLC entity for each RB. In the RLC
20 layer, RBs are mapped onto respective logical channels. A Medium Access Control, MAC, entity receives data transmitted in the logical channels and further maps logical channels onto a set of transport channels. In accordance with
25 subsection 5.3.1.2 of the 3GPP technical specification MAC should support service multiplexing e.g. for RLC services to be mapped on the same transport channel. In this case identification of multiplexing is contained in the MAC protocol control information.

30 Transport channels are finally mapped to a single physical channel which has a total bandwidth allocated to it by the network. In frequency division duplex mode, a physical

channel is defined by code, frequency and, in the uplink, relative phase (I/Q). In time division duplex mode a physical channel is defined by code, frequency, and time-slot. As further described in subsection 5.2.2 of the 3GPP
5 technical specification the L1 layer is responsible for error detection on transport channels and indication to higher layer, FEC encoding/decoding and interleaving/deinterleaving of transport channels.

None of the cited documents above discloses a method and
10 system for interaction between radio resource management/radio link layer and transport protocol dynamics.

SUMMARY OF THE INVENTION

Radio Resource Management of a radio communications system, such as a WCDMA system, may dynamically adapt the bandwidth
15 of a radio connection. Since the radio link bandwidth varies a lot, a transport protocol should adapt thereto. This could be achieved from interchange of information with radio resource management.

Consequently, it is an object of this invention to provide
20 a method and system for exchange of information between radio resource management and one or more transport protocol entities, such as TCP entities, and particularly to adapt transport protocol load control to link state information.

A related object is to provide data for efficient load control to the transport protocol for links with high latencies, and varying link characteristics, including bandwidth, BLER (block error rate) and RTT (round-trip time).
25

It is also an object of this invention to provide information transfer in the reverse direction, from transport protocol to radio resource management/radio resource control.
30

A further object is to accomplish buffer management and rate matching to meet the requirements as demanded by transport protocols.

5 Finally, it is an object to introduce a mechanism for load control in addition to relying on packet losses.

These objects are met by the invention, which is particularly well suited for a Universal Mobile Telecommunications System, UMTS, providing an interface between a transport protocol entity and channel resource management, particularly radio resource management.

Preferred embodiments of the invention, by way of examples, are described with reference to the accompanying drawings below.

BRIEF DESCRIPTION OF THE DRAWINGS

15 Figure 1 shows communication between a UE and a base station involved in a connection between an RNC and the UE.

Figure 2 displays a layered protocol structure, according to prior art, in a radio communications system.

20 Figure 3 displays a first embodiment for downlink radio resource management and load control, according to the invention.

Figure 4 displays a second embodiment for uplink radio resource management and load control, according to the invention.

25 Figure 5 illustrates schematically a third embodiment for radio resource management and load control, according to the invention.

DESCRIPTION OF PREFERRED EMBODIMENTS

Radio Resource Management of a radio communications system, such as a WCDMA system, may dynamically adapt the bandwidth of a radio connection. Since the radio link bandwidth varies a lot, a transport protocol should adapt thereto and interchange information with radio resource management.

The Transmission Control Protocol, TCP, is the main transport layer carrier of packet data in today's Internet. Wireless Internet access must therefore be designed to support TCP or other transport layer carriers operating similarly.

For the exemplary protocol TCP, a wireless link is a main contributor to highly time-varying demands on TCP load. The reasons are:

- 15 - the radio link rate is varying due to radio resource management, and
- the wireless link may introduce substantial latencies into the TCP connection due to retransmissions over the air interface to recover
- 20 transmission errors, as imposed by a radio link control protocol,
- varying required number of retransmissions and propagation distances cause varying round-trip time.

25 The radio link buffers of a radio network controller cannot be increased extensively, since this would lead to overbuffered links with long TCP round-trip time delays.

Because of the difficulties of adapting to radio link dynamics at a TCP sender with no means for receiving explicit radio link information from the TCP receiver, this inven-

30

tion suggests interaction between radio resource management and TCP receiver, determining its advertised window, *rwnd*, making use of the fact that the TCP sender advertises *rwnd* to TCP sender. The invention solves the identified problems of TCP and other transport protocols operating similarly.

When link limitations affecting a TCP sender window basically resides on the sender side prior art solutions incorporate this information for sender window adjustments at a considerable delay having the information being fed back from the TCP receiver side in acknowledgements or detected lack of acknowledgement. It is observed that much of this information can be made available to TCP from radio resource management for incorporation into the sender window control at a considerable smaller delay. Thereby, also the risk of overflowing radio link buffers and number of lost packets can be reduced.

Figure 3 displays a first embodiment for downlink radio resource management and load control, according to the invention. A transport protocol sender «TP sender», e.g. a TCP sender of a Web Server corresponding to «Server Device» of figure 1, transmits data packets «Data», e.g. TCP packets, to a transport protocol receiver «TP receiver», e.g. a TCP receiver of UMTS User Equipment «UE» illustrated in figure 1.

For reasons of implementation of the invention it is preferred that the transport protocol layer entity «TP» is included in or co-located with a radio link control protocol layer entity «L2».

When distributed over a radio communications system, such as UMTS, the protocol packets are passed over a radio network control node «RNC». A radio resource management en-

tity «RRM» responsible for allocating radio resources to various radio connections transmits radio resource data «RRdata», including e.g. data rate and radio link round-trip time delay data, to transport protocol receiver «TP receiver», «TP». According to the first embodiment of the invention, at least one parameter affecting load control, e.g. *rwnd* or *RMSS*, is determined on basis of the radio resource data.

Typically, radio resource data «RRdata» is transmitted over the same radio interface as payload «Data», involving radio link control protocol layer «L2» of radio network controller «RNC» and transport protocol receiver «TP receiver», respectively. This is indicated by a dotted line.

A common rule of dimensioning *rwnd* is to set the window size in relation to the link bandwidth delay product, increased for buffering. Assuming that the radio link is the bottleneck link, setting the link capacity, LC_{link} , proportional to the bandwidth delay product of the radio link is one exemplary rule for determining *rwnd*.

Assuming a connection being allocated a bit rate of 64 kbit/s and experiencing a radio link RTT in the range of 300–700 ms, would then yield a link capacity $LC_{down,link}$ of approximately 5 kbyte. Designing *rwnd* in the range $LC_{down,link} < rwnd < LC_{down,link} + B_{down}$, where B_{down} is downlink radio link buffer size, would result in exemplary practically usable *rwnd* in the range of 6–10 kbyte.

A radio link up-switch to e.g. 384 kbit/s would, with the same radio link RTT, yield a link capacity $LC_{down,link}$ of approximately 30 kbyte and result in exemplary practically usable *rwnd* in the range of 35–50 kbyte.

Transport protocol receiver «TP receiver» advertises *rwnd* to the transport protocol sender «TP sender» by including *rwnd* in transport protocol acknowledgements «TP ack».

5 Preferably, the transport protocol receiver «TP receiver» adjusts the receiver maximum segment size to the radio link characteristics.

According to prior art it is often preferable to keep transfer delay smaller than approximately 100-200 ms. This will introduce a limit on maximum size of segments to
10 transfer. It is however also desirable to use large segments to enhance TCP dynamics, when the bandwidth-delay product of a connection is large.

As an explicit non-exclusive example, consider a 384 kbit/s bearer. Transfer delay of a segment of 1.5 kbyte will then
15 be approximately 32 ms, which is less than 100-200 ms. However, for a 8 kbit/s the transfer delay of the same segment will be 1.5 s, significantly greater than 100-200 ms.

According to the invention, it is possible to dynamically change the segment size based on link conditions.

20 Figure 4 displays an embodiment for uplink radio resource management and load control, according to the invention. A transport protocol sender «TP sender», e.g. a TCP sender of UMTS User Equipment «UE» as illustrated in figure 1, transmitting data packets «Data», e.g. TCP packets, to a trans-
25 port protocol receiver «TP receiver», e.g. a TCP receiver of a Web Server corresponding to «Server Device» of figure 1.

A radio resource management entity «RRM», responsible for allocating radio resources to various radio connections,
30 transmits radio resource data «RRdata», including e.g. data rate and radio link round-trip time delay data, to trans-

port protocol receiver «TP receiver», «TP», preferably over a radio link control protocol layer «L2», as indicated by a dotted line. According to the second embodiment, the radio resource data forms a basis for determining at least one
5 load control parameter.

An upper limit $cwnd_{lim}$ is preferably imposed on the congestion window $cwnd$ of transport protocol sender, such that $cwnd < cwnd_{lim}$, where $cwnd_{lim}$ is determined on basis of the radio resource data, according to the invention. Thereby
10 overflowing of radio link buffers, due to TCP overflowing the radio link buffer, can be avoided. The imposed upper limit on $cwnd$, $cwnd_{lim}$, corresponds to the designed size of $rwnd$, i.e. in the range $LC_{up,link} < cwnd_{lim} < LC_{up,link} + B_{up}$, where B_{up} is uplink radio link buffer size, for uplink capacity,
15 $LC_{up,link}$.

Preferably, the transport protocol sender «TP sender» adapts the sender maximum segment size to the link conditions. The reasoning of the adaptation corresponds to that of adaptation of the receiver maximum segment size.

20 Figure 5 illustrates schematically a third embodiment for radio resource management and load control, according to the invention.

A transport protocol sender «TP sender» comprises a transport protocol layer entity «TP». The transport protocol
25 sender «TP sender», e.g. a TCP sender of UMTS User Equipment, sends data packets «Data» to a transport protocol receiver «TP receiver».

When distributed over a radio communications system, such as UMTS, the protocol packets are passed over a radio network control node «RNC». According to the third embodiment,
30 a radio resource management entity «RRM», responsible

for allocating radio resources to various radio connections, receives radio resource data «RRdata» sent from transport protocol sender «TP sender», the radio resource data comprising information on transport protocol sender
5 requested data rate or bit rate or other information related to data amount of requested data objects. This is used in radio resource management «RRM» for dynamic prediction of bandwidth needs. Typically, radio resource data «RRdata» is transmitted over the same radio interface as
10 payload «Data». This is indicated in the figure by a dotted line.

As in figure 3, transport protocol receiver «TP receiver» may acknowledge «TP ack» received transport protocol layer packets «Data» to transport protocol layer sender «TP
15 sender».

It should be apparent to the reader that the embodiments described in each of figures 3-5 readily can be combined and are particularly suitable for a transport protocol entity, such as a TCP entity, comprising both transport protocol receiver and transport protocol sender.
20

Preferably, all system elements, such as UEs and RNCs in UMTS, where applicable operate according to the invention. However, the invention can also be used in systems also including some equipment, such as UEs and RNCs, not operating
25 according to the invention.

A person skilled in the art readily understands that the receiver and transmitter properties of a BS or a UE are general in nature. The use of concepts such as BS, UE or RNC within this patent application is not intended to limit
30 the invention only to devices associated with these acronyms. It concerns all devices operating correspondingly, or being obvious to adapt thereto by a person skilled in

the art, in relation to the invention. As an explicit non-exclusive example the invention relates to mobile stations without a subscriber identity module, SIM, as well as user equipment including one or more SIMs. Further, protocols and layers are referred to in close relation with UMTS and Internet terminology. However, this does not exclude applicability of the invention in other systems with other protocols and layers of similar functionality. As a non-exclusive example, the invention applies for radio resource management interfacing of a connection protocol application layer as well as interfacing of a connection protocol transport layer, such as TCP.

The invention is not intended to be limited only to the embodiments described in detail above. Changes and modifications may be made without departing from the invention. It covers all modifications within the scope of the following claims.

CLAIMS

1. A method of load control in a radio communications system, the method characterized in that one or more signals carrying radio resource data are transferred from a radio resource management entity to a transport protocol receiver.
- 5
2. The method according to claim 1 characterized in that the radio resource management entity is included in or is a radio network controller.
3. The method according to claim 2 characterized in that the radio network controller controls radio resources of user equipment including or representing the transport protocol receiver.
- 10
4. A method of load control in a radio communications system, the method characterized in that one or more signals carrying radio resource data are transferred from a radio link control protocol layer to a transport protocol layer of a transport protocol receiver.
- 15
5. The method according to any of claims 1-4 characterized in that a transport protocol parameter is determined on basis of the transferred radio resource data.
- 20
6. The method according to claim 5 characterized in that the transport protocol parameter is receiver advertised window or receiver maximum segment size.
7. The method according to claim 5 or 6 characterized in that the transport protocol parameter is included in a transport protocol acknowledgement to a transport protocol sender.
- 25

8. The method according to claim 7 characterized in that the transport protocol parameter is a parameter of congestion control in the transport protocol sender.

5 9. The method according to any of claims 1-8 characterized in that the transport protocol receiver is included in or is a User Equipment.

10 10. A method of load control in a radio communications system, the method characterized in that one or more signals carrying radio resource data are transferred from a radio resource management entity to a transport protocol sender.

15 11. The method according to claim 10 characterized in that the radio resource management entity is included in or is a radio network controller.

20 12. A method of load control in a radio communications system, the method characterized in that one or more signals carrying radio resource data are transferred from a radio link control protocol layer to a transport protocol layer of a transport protocol sender.

13. The method according to any of claims 10-12 characterized in that a transport protocol parameter is determined on basis of the transferred radio resource data.

25 14. The method according to claim 13 characterized in that the transport protocol parameter is sender maximum send window or sender maximum segment size.

30 15. The method according to claim 14 characterized in that the sender maximum send window upper limits a transport protocol congestion control send window.

16. The method according to any of claims 1-15 c h a r -
a c t e r i z e d i n that the radio resource data is
link state information comprising at least one of

- radio link data rate or bit rate,
- 5 - round-trip time,
- block error rate,
- delay and
- packet loss rate.

17. The method according to any of claims 1-16 c h a r -
10 a c t e r i z e d i n that it is a method of dynamic load
control.

18. A method of radio resource management in a radio com-
munications system, the method c h a r a c t e r i z e d
i n that one or more signals carrying radio resource data
15 are transferred from a transport protocol sender to a radio
resource management entity.

19. The method according to claim 18 c h a r a c t e r -
i z e d i n that the radio resource management entity is
included in or is a radio network controller.

20 20. The method according to claim 18 or 19 c h a r a c -
t e r i z e d i n that radio link data rate or bit rate
is determined on basis of the transferred radio resource
data.

21. The method according to any of claims 18-20 c h a r -
25 a c t e r i z e d i n that the radio resource data is at
least one of

- requested radio link data rate or bit rate, and

- data related to data amount of one or more requested data objects.

22. The method according to any of claims 10-21 characterized in that the transport protocol sender
5 is included in or is a User Equipment.

23. The method according to claim 11 or 19 characterized in that the radio network controller controls radio resources of user equipment including or representing the transport protocol sender.

10 24. The method according to claim 23 characterized in that the transport control protocol is the Transport Control Protocol, TCP, used on the Internet.

25. A transport protocol receiver in a radio communications system characterized by circuitry for
15 receiving one or more signals carrying radio resource data and one or more processing elements for determining a transport protocol parameter of the transport protocol receiver on basis of the radio resource data.

26. A transport protocol receiver in a radio communications system characterized by circuitry for
20 transferring signals carrying radio resource data from radio link control protocol layer to transport protocol layer and one or more processing elements for determining a transport protocol parameter of the transport protocol receiver
25 ceiver on basis of the radio resource data.

27. The transport protocol receiver according to claim 25 or 26 characterized in that the transport protocol parameter is receive window or receiver maximum segment size.

28. The transport protocol receiver according to any of claims 25-27 characterized by a processing element for including the parameter in a transport protocol acknowledgement to a transport protocol sender.

5 29. The transport protocol receiver according to claim 25-28 characterized in that the radio resource data is link state information comprising at least one of

- radio link data rate or bit rate,
- 10 - round-trip time,
- block error rate,
- delay, and
- packet loss rate.

15 30. The transport protocol receiver according to any of claims 25-29 characterized in that the transport protocol receiver is a TCP receiver.

20 31. The transport protocol receiver according to any of claims 25-30 characterized in that the transport protocol receiver is included in or is a User Equipment.

32. A transport protocol sender in a radio communications system characterized by circuitry for receiving signals carrying radio resource data and one or more processing elements for determining a transport protocol parameter on basis of the radio resource data.

25

33. A transport protocol sender in a radio communications system characterized by circuitry for transferring signals carrying radio resource data from a radio link control protocol layer to a transport protocol

layer and one or more processing elements for determining a transport protocol parameter on basis of the radio resource data.

34. The transport protocol sender according to claim 32 or
5 33 characterized in that the transport protocol parameter is sender maximum send window or sender maximum segment size

35. The transport protocol sender according to claim 32 or
33 characterized by a processing element
10 for upper limiting the transport protocol layer send window for congestion control.

36. The transport protocol sender according to claim 32-35
characterized in that the radio resource data is link state information comprising at least one of
15 - radio link data rate or bit rate,
- round-trip time,
- block error rate,
- delay, and
- packet loss rate.

20 37. A transport protocol sender in a radio communications system characterized by one or more processing elements for determining radio resource data on basis of amount of data of requested objects and circuitry for transferring one or more signals carrying the radio re-
25 source data.

38. The transport protocol sender according to claim 37
characterized in that the transfer of the one or more signals is transfer to radio resource management.

39. The transport protocol sender according to any of claims 32-38 characterized in that the radio resource data is radio link data rate or bit rate.


40. The transport protocol sender according to any of
5 claims 32-39 characterized in that the transport protocol sender is a TCP sender.

41. The transport protocol sender according to any of
claims 32-40 characterized in that the
transport protocol sender is included in or is a User
10 Equipment.

42. A radio communications system characterized
i z e d b y means for carrying out the method in any of
claims 1-24.

43. A radio communications system characterized
15 i z e d b y a plurality of transport protocol transceiv-
ers according to any of claims 25-41.

1/3

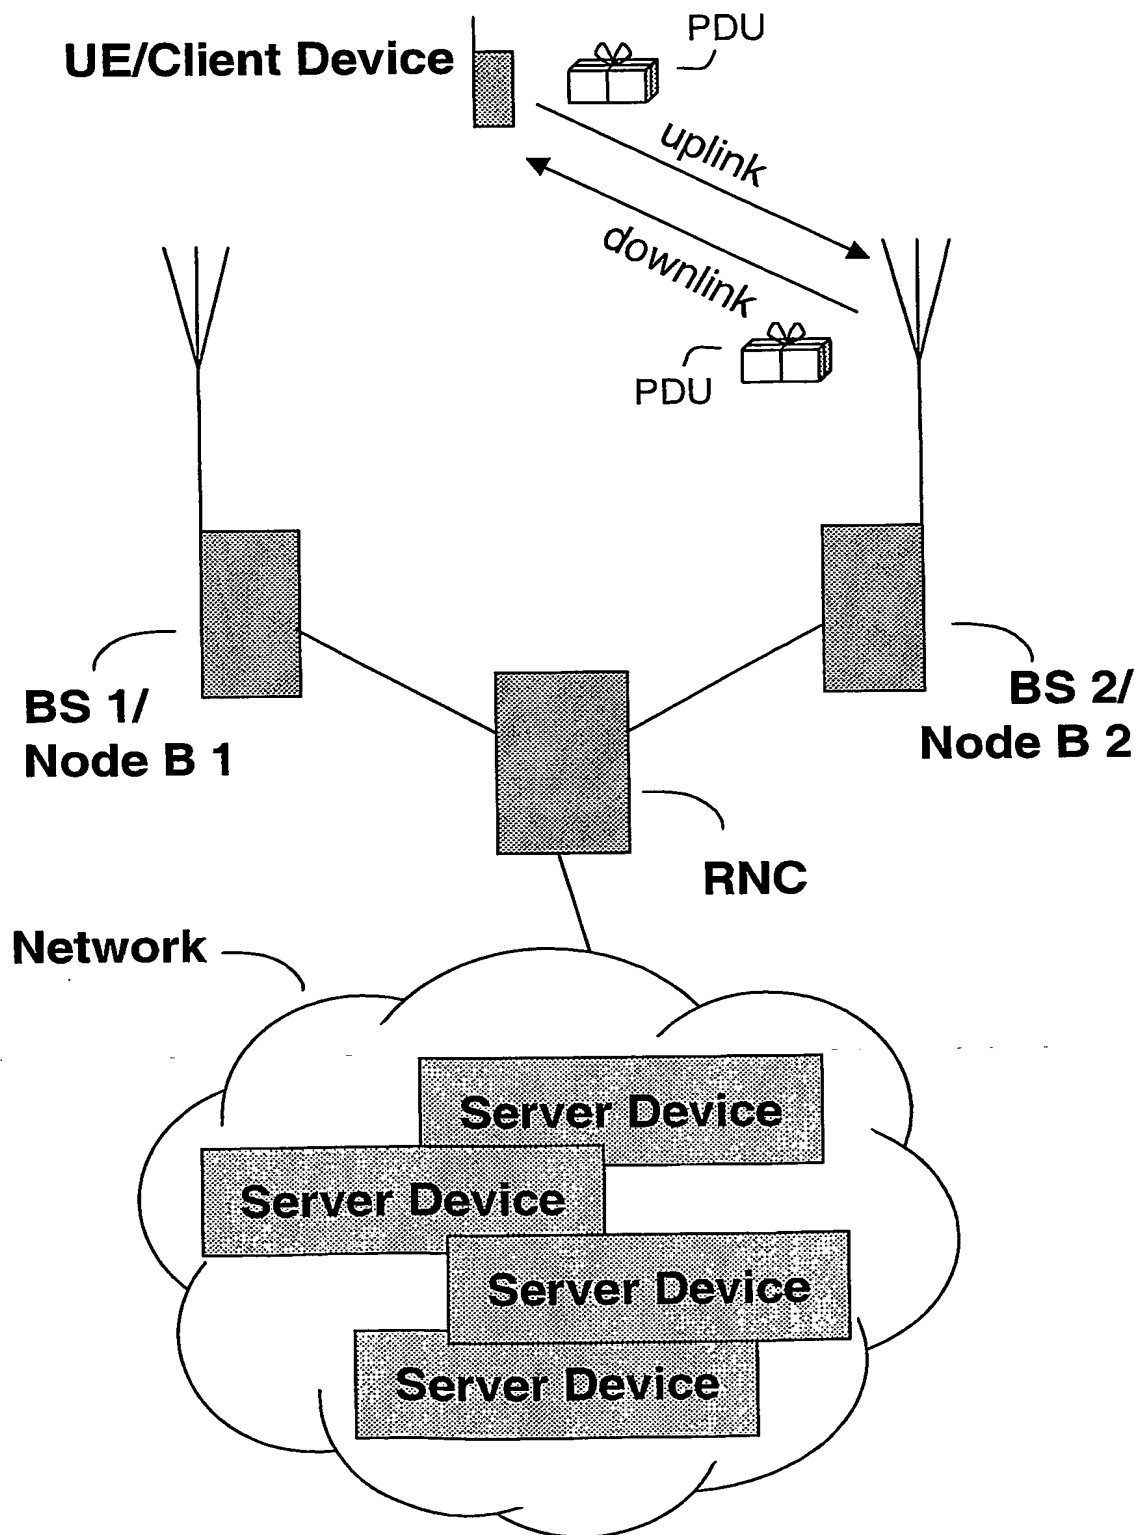**Fig. 1**

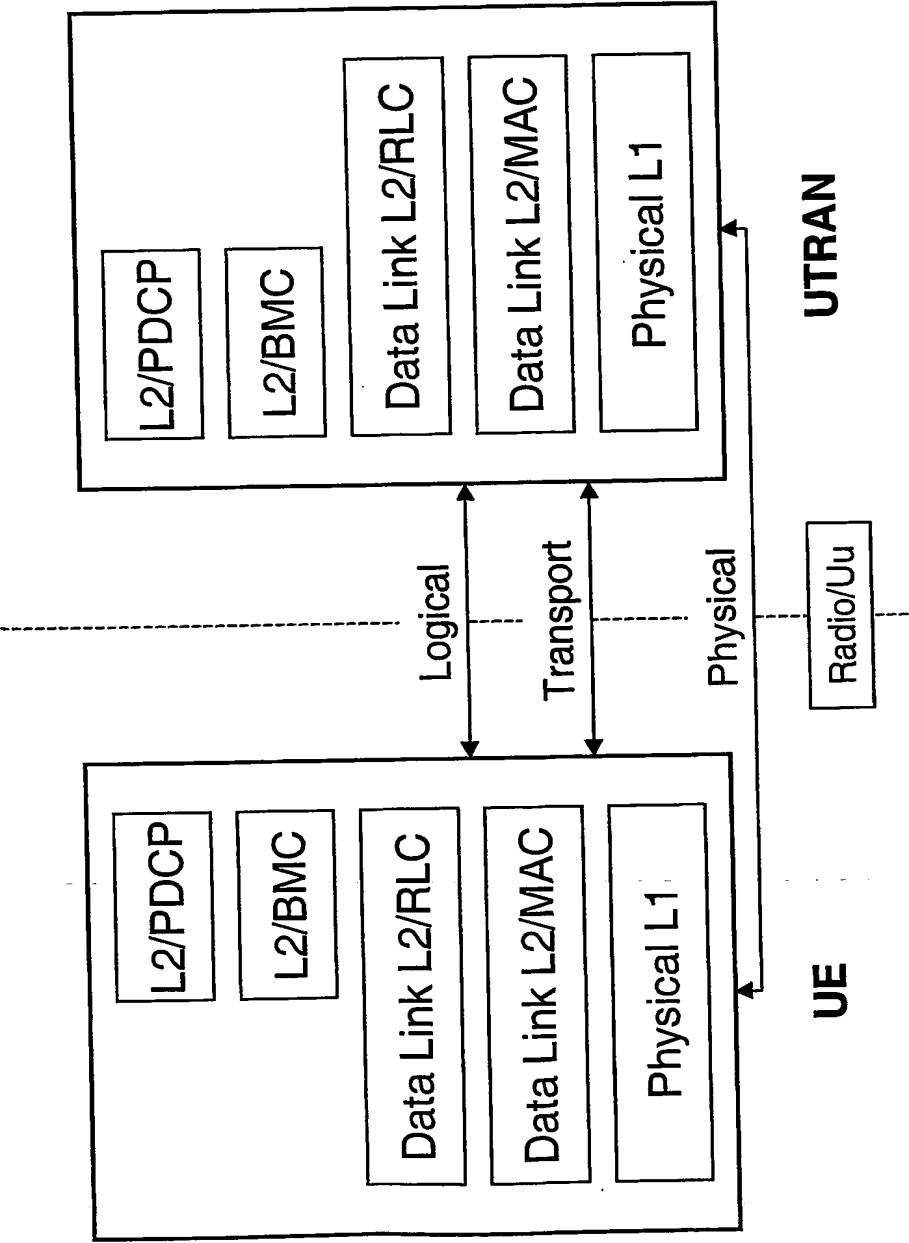
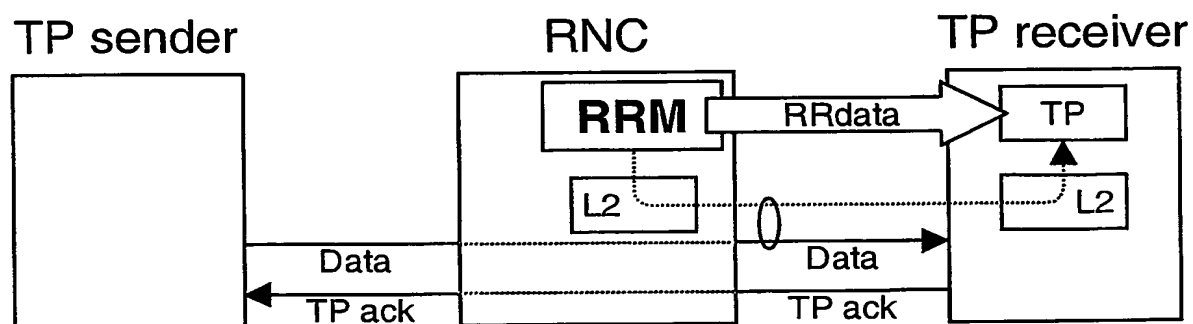
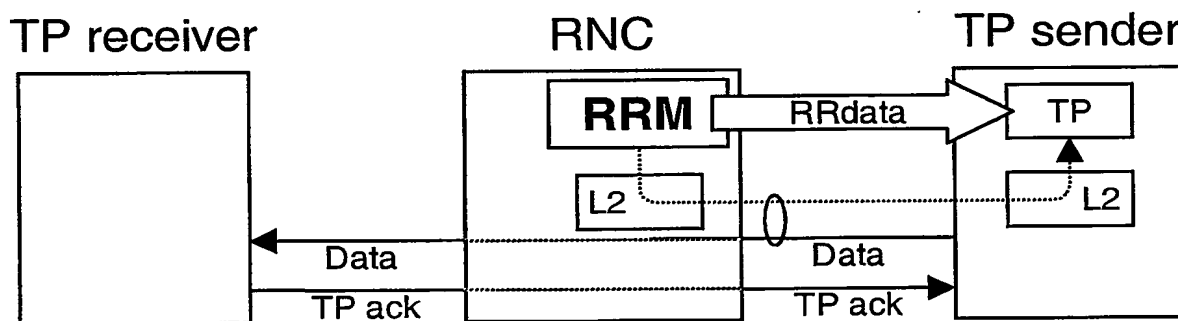
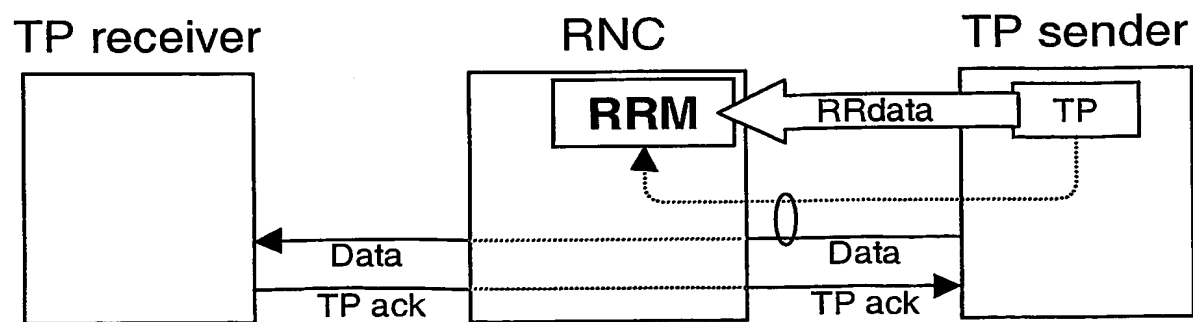


Fig. 2

3/3

**Fig. 3****Fig. 4****Fig. 5**

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 03/00383

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 7/005, H04L 12/56, H04L 29/06
According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B, H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	HUA XU et al: Performance analysis on the radio link control protocol of UMTS system. In: Vehicular Technology Conference, 2002. Proceedings from VTC 2002-Fall. 2002 IEEE 56th, pages 2026-2030, vol.4, 2002.	1-43
A	US 2002016851 A1 (BORDER, J.), 7 February 2002 (07.02.02)	1-43
A	US 6151300 A (HUNT, D.H. ET AL), 21 November 2000 (21.11.00)	1-43

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

19 May 2003

Date of mailing of the international search report

23 -05- 2003

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Marianne Engdahl /LR
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

29/04/03

International application No.

PCT/SE 03/00383

Patent document cited in search report		Publication date		Patent family member(s)		Publication date	
US	2002016851	A1	07/02/02	CA	2353295 A	21/01/02	
				CA	2353325 A	21/01/02	
				CA	2353328 A	21/01/02	
				CA	2353329 A	21/01/02	
				CA	2353332 A	21/01/02	
				CA	2353339 A	21/01/02	
				CA	2353345 A	21/01/02	
				CA	2353348 A	21/01/02	
				EP	1175042 A	23/01/02	
				EP	1175045 A	23/01/02	
				EP	1175050 A	23/01/02	
				EP	1175051 A	23/01/02	
				EP	1175064 A	23/01/02	
				EP	1175065 A	23/01/02	
				EP	1175066 A	23/01/02	
				EP	1176788 A	30/01/02	
				IL	144429 D	00/00/00	
				IL	144432 D	00/00/00	
				IL	144435 D	00/00/00	
				IL	144449 D	00/00/00	
				IL	144450 D	00/00/00	
				IL	144451 D	00/00/00	
				IL	144452 D	00/00/00	
				IL	144453 D	00/00/00	
				US	2002010765 A	24/01/02	
				US	2002010792 A	24/01/02	
				US	2002013840 A	31/01/02	
				US	2002034173 A	21/03/02	
				US	2002038373 A	28/03/02	
				US	2002059435 A	16/05/02	
				US	2002071436 A	13/06/02	
				US	2002133596 A	19/09/02	
US	6151300	A	21/11/00	AU	717590 B	30/03/00	
				AU	3006097 A	05/01/98	
				CN	1104686 B	02/04/03	
				CN	1224518 A	28/07/99	
				EP	1021765 A	26/07/00	
				JP	2001501785 T	06/02/01	
				WO	9745978 A	04/12/97	

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.